


## Salamander Controller Model S2 S-SLM-CTLS2

Temperature  
Humidity  
Water Leak  
Dry-contact  
PIR\*

Card Reader  
SNMP  
Wireless Sensors\*  
IP Camera\*  
SMS Text\*

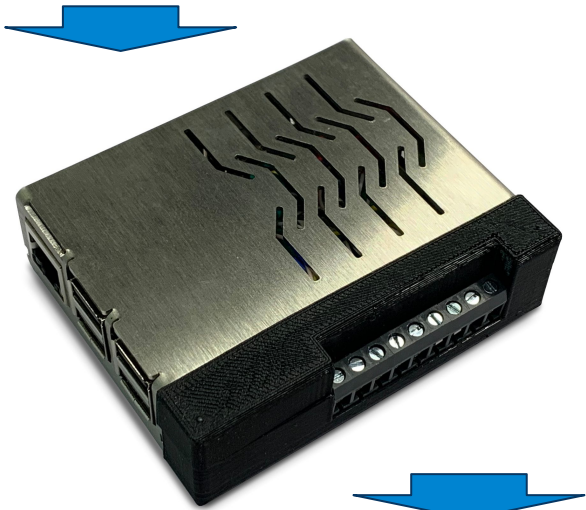

Web Interface  
Dashboards  
Reports  
e-mail

SNMP  
SMS Text\*  
4 Relay board\*

The Salamander Controller Model S2 greatly expands the connectivity options over the Controller Model S.

In addition to temperature and humidity sensors, leak detectors and door open sensors, a 4 relay output board and proximity card readers are now supported.

The unit collects data from several inputs and from SNMP devices like Smart PDUs and manages alarms, emails, reports and SMS text messages.

Data is stored internally in a database and Reports with historical data can be produced and e-mailed automatically.

The Salamander Controller Model S2 can manage several wireless satellite units for additional connectivity options.

Supports: HTTPS, SMTP, SNMP V2, FTP, Ethernet 100Mbps, WiFi, GSM satellite\*, Access Control features\*, IP Cameras, and more.

\*Requires additional components

### Specifications

- Ethernet Port
- Digital Sensor Connectors
- Temperature & humidity sensor port
- Dry contact input/output ports
- Loaded with Salamander S-SLM-BS01 software package
- 2 x USB Ports for External storage connection and firmware updates

### References

S-SLM-CTLS2 Salamander Controller Model S  
 S-SLM-SSDT Salamander Temperature Digital Sensor  
 S-SLM-SST6 Salamander Sensor 6x Temperature Digital  
 S-SLM-SSTH Salamander Sensor Temperature & Humidity  
 Check additional sensors and details online  
 S-SLM-SUPP Salamander Support 1Y

